



Cell Type N-1600SCB Specifications

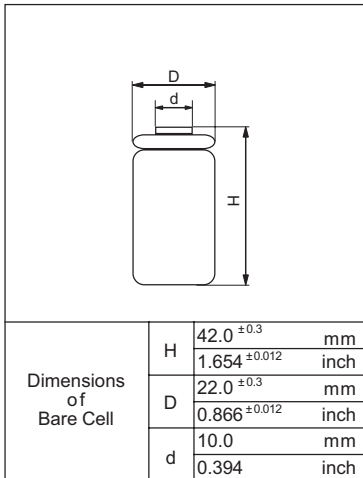


Nominal Capacity		1600mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	160mA	
	Fast	480mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	4 to 6Hrs.	
Ambient Temperature	Charge	Standard	0°C to +70°C [+32°F to 158°F]
		Fast	10°C to +70°C [+50°F to 158°F]
	Discharge		-20°C to +70°C [-4°F to 158°F]
	Storage		-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		4.1mΩ (at 1000Hz)	
Weight		57g/ 2.01oz	
Dimensions(D)x(H) (with tube)		22.9 ⁰ ₋₁ × 42.9 ⁰ _{-1.2} mm 0.90 ⁰ _{-0.04} × 1.69 ⁰ _{-0.05} inch	

Typical Characteristics


Charge

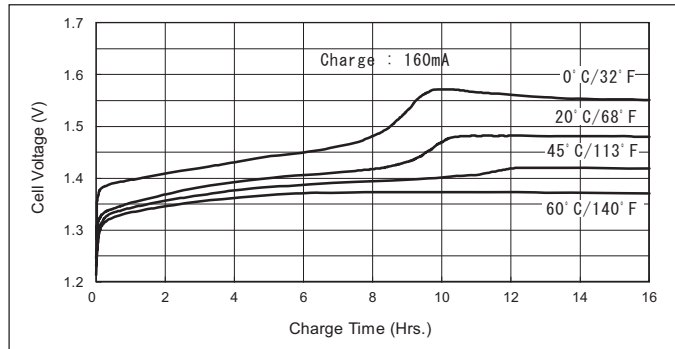


Discharge(at high rate)

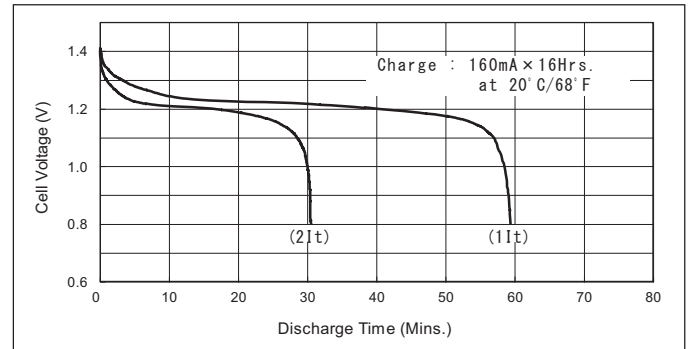


Cell Capacity(at various discharge rate)

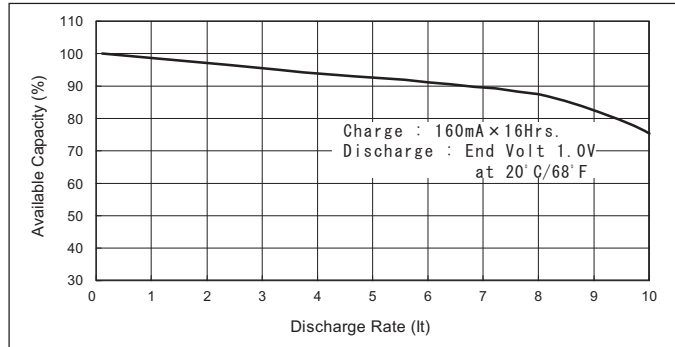

Discharge(at high rate)

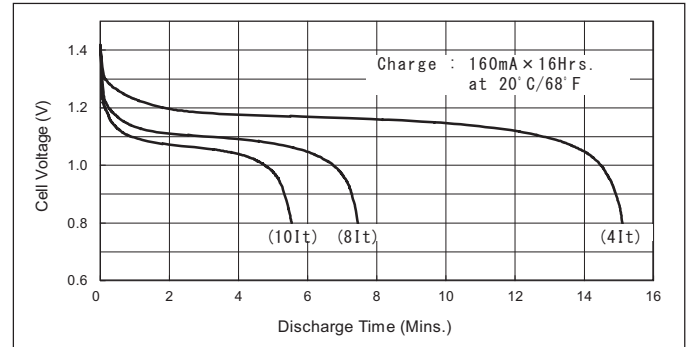

Discharge(at low rate)

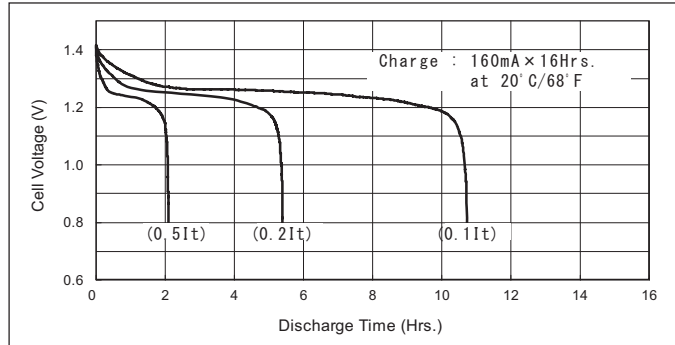

Temperature(Charge & Discharge)

