


Dimensions

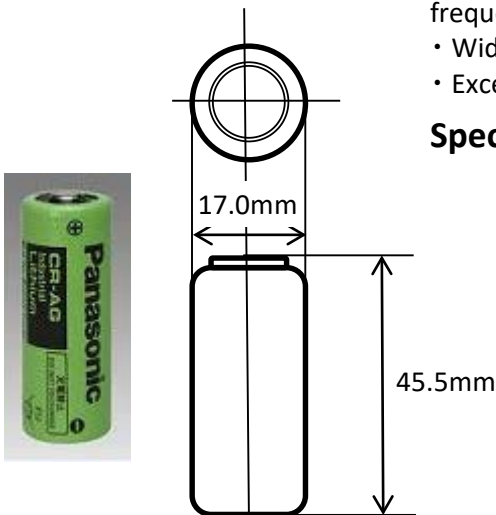

* Panasonic offers batteries with tabs or lead wires.

Features & Benefits

- Enables a long-term operation of devices which is difficult to replace batteries frequently.
- Wide range operating temperature
- Excellent high-pulse discharging performance


Specifications

Part number	CR-AG	
Nominal Voltage	3V	
Nominal Capacity	2,400mAh	
Continuous drain	2.5mA	
Dimensions* ¹	Diameter(Max.)	17.0mm
	Height(Max.)	45.5mm
Weight* ¹	Approx. 22.0g	
Operating Temperature	-40°C ~ +85°C* ²	


*¹ Without tabs

*² Please consult Panasonic when anticipating usage in operating temperature 70°C or above.

Long-term Storage Characteristics

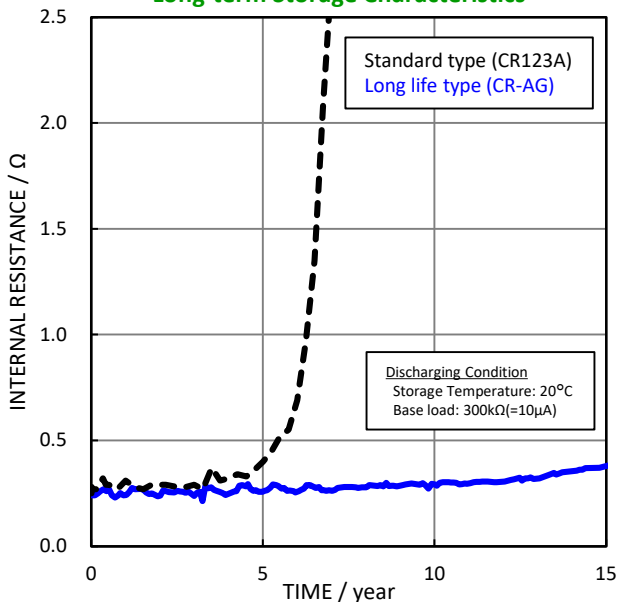

Discharge Characteristics by Temperature

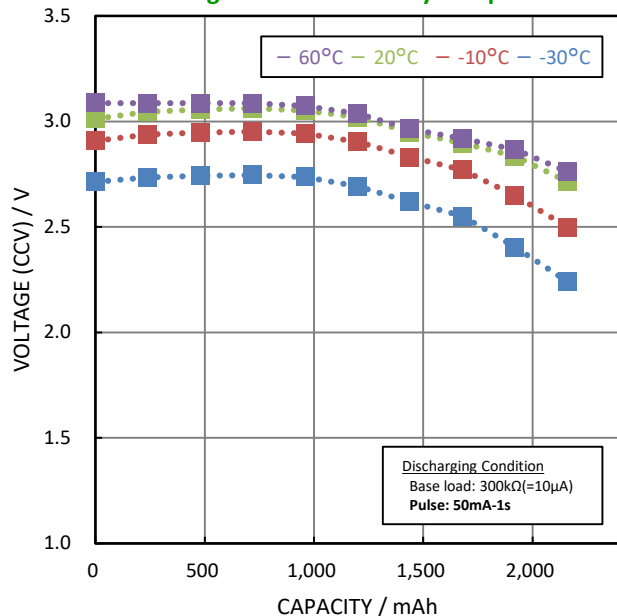

Terminal types

Through hole type



* For customized tab terminal or for any other information, please ask Panasonic sales person.

Applications

Fire alarms, utilities for gas and water, IoT/sensing devices and others.

This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. As of October, 2020. The contents of this product information are subject to change without notice.

Please visit our website at:

Panasonic Corporation

<https://industrial.panasonic.com/ww/products/batteries/primary-batteries/lithium-batteries>

